



504-362-0781 or 800-889-0781
2236 Manhattan Blvd. Harvey, LA 70058 Fax: 504-367-4216

Closed Spelter Sockets


IMPORTED AND DOMESTIC SPELTER WIRE ROPE SOCKETS

Caution: When attaching spelter sockets to wire rope it is extremely important to follow recommended procedures, such as outlined by the Wire Rope Technical Board. Proper brooming and cleaning of wire rope is important. If resin is used, follow resin manufacturer's specific installation instructions.

CLOSED SPELTER SOCKETS

Hot galvanized. Forged sockets through 1.1/2". Alloy cast steel 1.5/8" and larger.
5/16"-2.1/2" according to Federal Specifications RR-S550D. Amendment 1.

Efficiency of spelter terminations: 100% of the catalog breaking strength of wire rope. These drawings illustrate one groove used on sockets 1/2" & smaller. Sizes 9/16"-1.1/2" have two grooves. Sizes 1.3/4" & larger have three grooves.

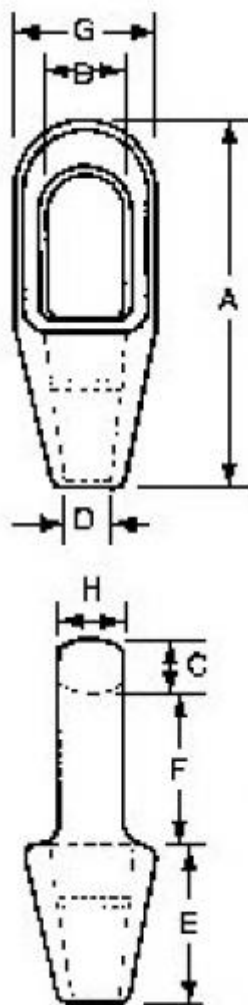

Size	A	B	C	D	E	F	G	H	Wt. ea. in lbs.
Size	A	B	C	D	E	F	G	H	Wt. ea. in lbs.
5/16"-3/8"	4.88	.94	.63	.50	2.25	2.00	1.69	.69	1.1
7/16"-1/2"	5.44	1.13	.69	.56	2.50	2.25	2.00	.88	1.5
9/16"-5/8"	6.31	1.38	.81	.69	3.00	2.50	2.63	1.00	3.0
3/4"	7.56	1.63	1.06	.81	3.50	3.00	3.00	1.25	4.5
7/8"	8.75	1.88	1.25	.94	4.00	3.50	3.63	1.50	7.0
1"	9.88	2.25	1.38	1.13	4.50	4.00	4.13	1.75	11.0
1 1/8"	11.00	2.50	1.50	1.25	5.00	4.50	4.50	2.00	16.0
1 1/4"-1.3/8"	12.13	2.75	1.63	1.50	5.50	5.00	5.00	2.25	22.0
1 1/2"	13.94	3.13	1.94	1.63	6.00	6.00	5.38	2.50	28.0
1.5/8"	15.38	3.25	2.13	1.75	6.50	6.76	5.75	2.75	36.0
1 3/4"-1.7/8"	17.25	3.53	2.19	2.00	7.50	7.56	6.75	3.00	58.0
2"-2.1/8"	19.50	3.78	2.44	2.25	8.50	8.56	7.63	3.25	80.0
2.1/4"-2.3/8"	21.38	4.28	2.88	2.50	9.00	9.50	8.50	3.63	105.0
2.1/2"-2.5/8"	23.50	5.50	3.13	2.88	9.75	10.63	9.50	4.00	140.0
2.3/4"-2.7/8"	25.38	6.50	3.13	3.13	11.00	11.25	10.75	4.88	220.0
3"-3.1/8"	27.00	6.75	3.25	3.38	12.00	11.75	11.50	5.25	276.0