



504-362-0781 or 800-889-0781
2236 Manhattan Blvd. Harvey, LA 70058 Fax: 504-367-4216


Pear Shaped Sling Links

Sizes 3/8" thru 1.3/8" Carbon Steel, Working Load Limit based on 6 times Minimum Ultimate Breaking Strength. Proof Load tested. Sizes 1.1/2" thru 2.3/4" Alloy Steel, meet the performance requirements of A.S.T.M. A952 (Grade 80), as applicable. Working Load Limit based on 5 times Minimum Ultimate Breaking Strength. Proof Load Tested - U.S. made.

PEAR SHAPED SLING LINKS

3/8" through 1.1/4" forged, larger sizes welded. Heat treated, painted, or hot galvanized.

CAUTION: NEVER EXCEED THE WORKING LOAD LIMIT.

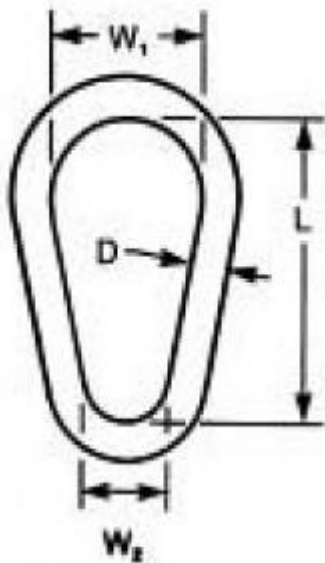

Sizes 1.1/2" and Larger - DOMESTIC

-D- Size - inches	Working Load Limit lbs. (Single Leg Sling)	L x W1 x W2	Approx. Wt. ea. lbs.
-D- Size - inches	Working Load Limit lbs. (Single Leg Sling)	L x W1 x W2	Approx. Wt. ea. lbs.
3/8"	1,800	2.25X1.50X.75	.25
1/2"	2,900	3.00X2.00X1.00	.58
5/8"	4,200	3.75x2.50x1.25	1.12
3/4"	6,000	4.75x2.75x1.38	1.92
7/8"	8,300	5.25x3.50x1.75	3.03
1"	10,800	6.00x3.75x1.88	4.58
1.1/4"	16,750	8.00x5.00x2.50	8.96
1.3/8"	20,500	8.5x5.50x2.75	11.65
1.1/2"	47,880	9.00x6.00x3.00	17.0
1.3/4"	62,520	10.50x7.00x3.50	24.3

-D- Size - inches	Working Load Limit lbs. (Single Leg Sling)	L x W1 x W2	Approx. Wt. ea. lbs.
2"	97,680	12.00x8.00x4.00	37.0
2.1/4"	119,400	13.50x8.00x4.50	47.5
2.1/2"	147,300	15.00x10.00x5.00	67.0
2.3/4"	178,200	16.50x11.00x5.50	83.9
